




Available Colors
Pantone Black C

Features & Benefits

- High-efficiency 400w (1+1) redundant power supply
- Support up to 6.0 Gbps SAS/SATA
- Support up to ATX 12" x 9.6" compliant motherboard
- Support 8 x 3.5" hot-swap HDD and 2x 2.5" internal HDD
- 4x Non-hot swap dual-rotor cooling fan
- Excellent anti-vibration mechanical design and thermal solution
- Outstanding wire-less design

SPECIFICATIONS

Form Factor (H) x (W) x (D)	1RU 8-Bay, 19" Rackmount Chassis 1.71" x 17.2" x 27.55" 43.5 mm x 437 mm x 700 mm
Drive Bay	8x 3.5" Hot Swappable HDD Bracket 2x 2.5" Internal HDD Bracket (up to 9.5 mm high)
Mother Board	Up to ATX 12" x 9.6" (305 mm x 244 mm)
Processor	Dual or Single Intel® or AMD® Processors
Control Panel	1x System Power Button 1x System Reset Button 1x USB 2.0 Port
Indicator	2x Network Activity LED 1x Power on LED 1x Power Fail LED 1x Fan Failed LED 1x HDD Access LED 1x HDD Status LED per HDD 1x HDD Failed LED per HDD
Expansion Slot	1x Standard Expansion Slot
Expander Backplane	2x 3.5" 6Gbps SAS/SATA HDD Backplane mini SAS Connector (SFF-8087 including SGPIO)
Fan Module	4x Non-Hot Swap Dual-Rotor Cooling Fan
Electrical Requirement	High-efficiency 400w (1+1) Redundant Power Supply W/ PFC, AC 100~240V Full Range, 47Hz~63Hz
Environmental	Operating: 10°C~35°C (50°F~94.9°F) Non-operating: -40°C~70°C (-40°F~158°F), 5% ~85% Non-condensing
Weight	Enclosure: 15kg (33lbs) Packaged: 23kg (51lbs) (Hard Drive and Slide Rail Not Included)
Package Dimension (H) x (W) x (D)	241 mm × 591 mm × 881 mm

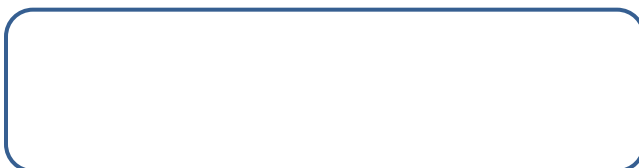

INISTOR Headquarter

Address: 5F., No.252, Sec.2, New Taipei Blvd., San Chong
Dist., New Taipei City 241, Taiwan, R.O.C.

Tel: +886-2-2995-1439 Fax: +886-2-2995-7705

E-mail: sales@inistor.com