




Rackmount Chassis 2U24MFC

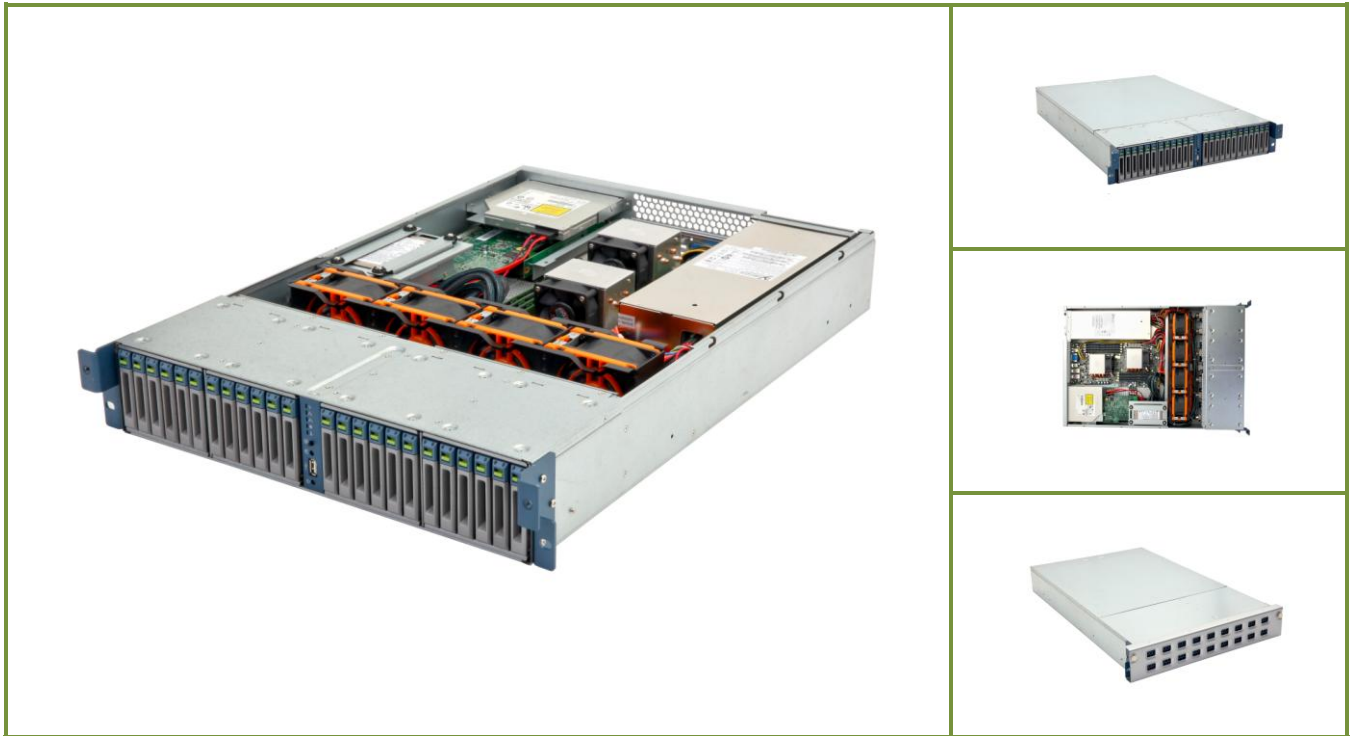


Features & Benefits

- High-efficiency 720w (1+1) redundant power supply
- Support up to 6.0 Gbps SAS/SATA
- Support up to SSI EEB 12" x 13" compliant motherboard
- Fully utilized space to support 24x 2.5" hot-swap HDD and 2x 2.5" internal HDD
- Support 1x Ultra slim type DVD
- 4 x 80 mm hot-swappable system cooling fan module
- EMCU provides audible alarm and LED function
- Excellent anti-vibration mechanical design and thermal solution
- Outstanding wire-less design

SPECIFICATIONS

Form Factor (H) x (W) x (D)	2RU 24-Bay, 19" Rackmount Chassis 3.47" x 17.2" x 25.5" 88.1 mm x 437 mm x 647.7 mm
Drive Bay	24x 2.5" Hot Swappable HDD Caddy 1x 2.5" Internal HDD Bracket (Support 2x 2.5" HDD) 1x Ultra Slim Type ODD (Option)
Mother Board	Up to SSI EEB 12" x 13" (305 mm x 330 mm)
Processor	Dual or Single Intel® or AMD® Processors
Control Panel	1x System Power Button 1x System Reset Button 1x Alarm Release Button 1x USB 2.0 Port
Indicator	1x Power Status LED 2x Network Activity LED 1x Overheat LED 1x Fan Failed LED 1x HDD Status LED per HDD 1x HDD Failed LED per HDD 1x Fan Operated LED per Fan Module 1x Fan Failed LED per Fan Module
Expansion Slot	1x Standard Expansion Slot
Expander Backplane	2x 2.5" 6Gbps SAS/SATA HDD Backplane mini SAS Connector (SFF-8087 including SGPIO)
Fan Module	4x 80 mm Hot Swappable Fan Module
Electrical Requirement	High-efficiency 720w (1+1) Redundant Power Supply W/ PFC, AC 90~264V Full Range, 47Hz~63Hz
Monitor and Alarm	Overheat Monitoring and Warning System Fan Module Status Monitoring and Warning Power Supply Unit Status Monitoring and Warning HDD Status Monitoring and Warning
Environmental	Operating: 10°C~35°C (50°F~94.9°F) Non-operating: -40°C~70°C (-40°F~158°F), 5% ~85% Non-condensing
Weight	Enclosure: 21kg (46Ibs) Packaged: 29kg (64Ibs) (Hard Drive and Slide Rail Not Included)
Package Dimension (H) x (W) x (D)	291 mm x 591 mm x 881 mm

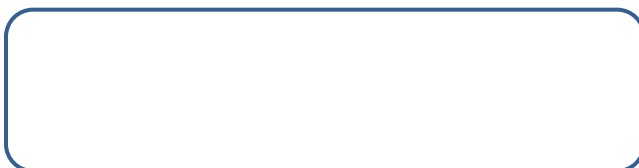

INISTOR Headquarter

Address: 5F., No.252, Sec.2, New Taipei Blvd., San Chong
Dist., New Taipei City 241, Taiwan, R.O.C.

Tel: +886-2-2995-1439 Fax: +886-2-2995-7705

E-mail: sales@inistor.com