




Rackmount Chassis 2U24SSR Gen.2

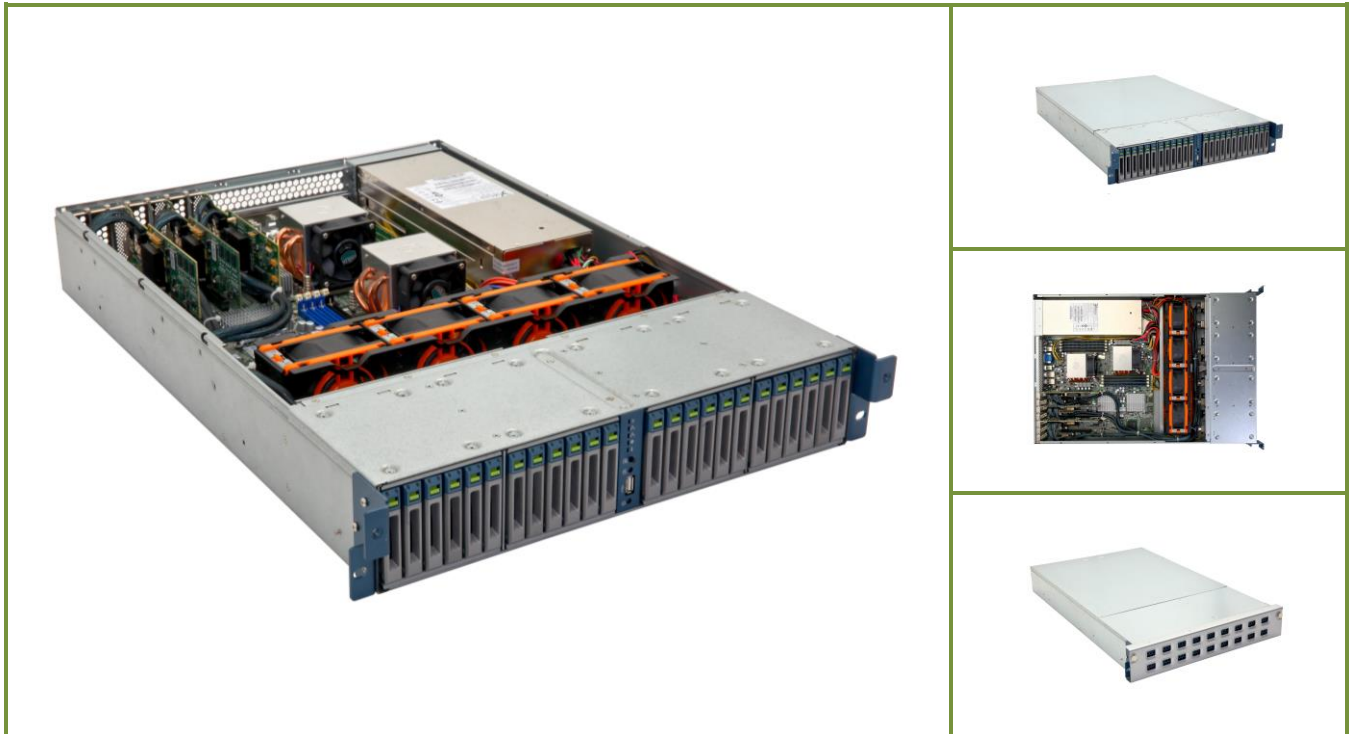


Features & Benefits

- High-efficiency 720w (1+1) redundant power supply
- Support up to 12 Gb/s SAS/SATA
- Support up to SSI EEB 12" x 13" compliant motherboard
- Fully utilized space to support 24x 2.5" hot-swap HDD
- 4x 80 mm hot-swappable system cooling fan module
- EMCU provides audible alarm and LED function
- Excellent anti-vibration mechanical design and thermal solution
- Outstanding wire-less design

SPECIFICATIONS

Form Factor (H) x (W) x (D)	2RU 24-Bay, 19" Rackmount Chassis 3.47" x 17.2" x 25.5" 88.1 mm x 437 mm x 647.7 mm
Drive Bay	24x 2.5" Hot Swappable HDD Caddy
Mother Board	Up to SSI EEB 12" x 13" (305 mm x 330 mm)
Processor	Dual or Single Intel® or AMD® Processors
Control Panel	1x System Power Button 1x System Reset Button 1x Alarm Release Button 1x USB 2.0 Port
Indicator	1x Power Status LED 2x Network Activity LED 1x Overheat LED 1x Fan Failed LED 1x HDD Status LED per HDD 1x HDD Failed LED per HDD 1x Fan Operated LED per Fan Module 1x Fan Failed LED per Fan Module
Expansion Slot	7x Low Profile Expansion Slot or 3x Standard Expansion Slot
Expander Backplane	6x 2.5" 12Gbps SAS/SATA HDD Backplane mini SAS Connector (SFF-8643 including SGPIO)
Fan Module	4x 80 mm Hot Swappable Fan Module
Electrical Requirement	High-efficiency 720w (1+1) Redundant Power Supply W/ PFC, AC 90~264V Full Range, 47Hz~63Hz
Monitor and Alarm	Overheat Monitoring and Warning System Fan Module Status Monitoring and Warning Power Supply Unit Status Monitoring and Warning HDD Status Monitoring and Warning
Environmental	Operating: 10°C~35°C (50°F~94.9°F) Non-operating: -40°C~70°C (-40°F~158°F), 5% ~85% Non-condensing
Weight	Enclosure: 20kg (44Ibs) Packaged: 28kg (62Ibs) (Hard Drive and Slide Rail Not Included)
Package Dimension (H) x (W) x (D)	291 mm × 591 mm × 881 mm

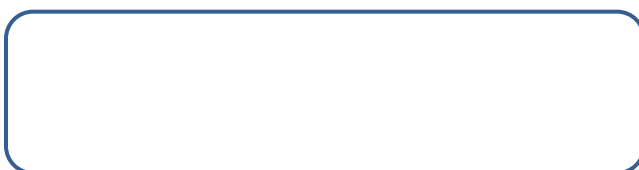

INISTOR Headquarter

Address: 5F., No.252, Sec.2, New Taipei Blvd., San Chong
Dist., New Taipei City 241, Taiwan, R.O.C.

Tel: +886-2-2995-1439 Fax: +886-2-2995-7705

E-mail: sales@inistor.com