



Tower Chassis T108BSR




Available Colors
Pantone Black C

Features & Benefits

- Support up to 6.0 Gbps SAS/SATA
- Support up to micro ATX 9.6" x 9.6" compliant motherboard
- Support 8 x 3.5" hot-swap HDD
- Outstanding wire-less design

SPECIFICATIONS

Form Factor (H) x (W) x (D)	Tower Chassis, 8-Bay 6.24" x 10.2" x 18.95" 158.5 mm x 259 mm x 481.2 mm
Drive Bay	8x 3.5" Hot Swappable HDD Caddy
Mother Board	Up to micro ATX 9.6" x 9.6" (244 mm x 244 mm)
Processor	Single Intel® or AMD® Processors
Control Panel	1x System Power Button 1x System Reset Button
Indicator	1x Power on LED 1x HDD Access LED 1x HDD Status LED per HDD 1x HDD Failed LED per HDD
Expansion Slot	4x Standard Expansion Slot
Expander Backplane	2x 3.5" 6Gbps SAS/SATA HDD Backplane mini SAS Connector (SFF-8087 including SGPIO)
Fan Module	1x 120 mm Cooling Fan
Electrical Requirement	High-efficiency 500w Power Supply W/ PFC, AC 90~264V Full Range, 47Hz~63Hz
Environmental	Operating: 10°C~35°C (50°F~94.9°F) Non-operating: -40°C~70°C (-40°F~158°F), 5% ~85% Non-condensing
Weight	Enclosure: 11kg (24lbs) Packaged: 15kg (33lbs) (Hard Drive and Slide Rail Not Included)
Package Dimension (H) x (W) x (D)	250 mm x 380 mm x 610 mm

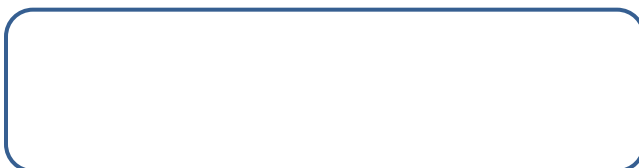

INISTOR Headquarter

Address: 5F., No.252, Sec.2, New Taipei Blvd., San Chong Dist., New Taipei City 241, Taiwan, R.O.C.

Tel: +886-2-2995-1439 Fax: +886-2-2995-7705

E-mail: sales@inistor.com